SPEEDY Slatted Cover		ication required: ] No	FROM NOVEMBER TO MARC	CH APRIL D+6	FROM MAY TO AUGUST  D+7	SEPTEMBER, OCTOBER  D+6
Customer N°:		Customer reference	5	Order for	m date:	
Company contact de	etails:		Delivery address:			
Surname:			Name:			
Postcode:	City:		Address:			
Country:	Phone:		Postcode:		City:	
E-mail:			Country:			
Contact in case of m	nissing measu	ırements:	Access: Semi-traile	er 🗆 Ca	rrier Other:	
			Fill in the truck access checking guide on the following pages			
			Pick up at DEL Bréd		5 5	01 0
New build pool	Existing p		taking again measurer Imber or reference of th			
If all the information	is not complete	d, your order cannot be pr	ocessed and therefore put int	to productio	n with the announced l	eadtime.
VERSIONS						
☐ Electric ☐ Solo	ar					
CONTROLS				OPTIC	ON (only for electric	version)
☐ Wi-Key ☐ Key	switch			Live	ePool Cover	
CLOSING CONTROLS						
Maintain contact (d	efault choice)	☐ Impulse on				
OPTIONS						
Stop salt control box (only for the electric version)  Automatic stop  Wall mounting  Yes No  Yes No  Extra Wi-Key emitter  If so, indicate the quantity (max. 3):  Remote Wi-Key receiver box  (for covers from 6.00 x 26.50 m and 7.00 x 24.50 m)						
SLATS						
Opaque PVC 84 slats  White Grey	Choose	e PVC opaque 69 slats fo	r pool widths of 5.05m or mo	ore.		
Solar polycarbonate slats - 69 mm (not compatible with bromine treatment)  Crystal black Silver Absolute black Crystal blue* Crystal* Crystal brown* Crystal green*  Leave one slat out of three without end cap to ease the sliding of the slats: AD side BC side  By default, all endcaps will be installed.  Opaque PVC 69 slats  White Beige Grey Blue*  Leave one slat out of three without end cap to ease the sliding of the slats: AD side BC side  By default, all endcaps will be installed.						
Additional lead time for slats over 6 m long. *Additional lead time.  STAIRS OR SLAT CUT-OUT						
Roman stair	Square stair	Trapezoid stair	r Slat cut-out (at	tach a pla	an)	
LOCKING KITS				. 1		
Pushlock White Beige Quicklock + Tool (on White Beige White straplock kit Concrete coping an	ly for opaque P Grey  (only for opaqu	Dark grey Blue VC 69 and solar polycarb e PVC 69 and solar polyco lood coping anchors	onate slats)		Fittings:  Insert mount  Surface mount  Hanging mount  High hanging mo	ount (Pushlock only)
WINTER SHIFT / PROTI						
Ivernea: Yes Fill in the			No <b>Ivernea Plus:</b> Ye	s Fill in the	order form on the fo	ollowing pages No



Customer N°:	Customer reference:
POOL TYPE	
Polyester shell	
- Brand:	
- Model:	
☐ Concrete ☐ Res	sin Wood
Polystyrene block	Metal
WATERTIGHTNESS	
□ Liner*	On-site lining
Tiles	☐ Coated
Other:	
	a radius of 5 cm will be made
POOL	
Diagonals	<b>K</b>
Diagonal AC =	cm
Diagonal BD =	cm
Overflow	
Yes (by default 1 even on () AB () BC	ery 4 m on each length) CD  AD
□No	
O Infinity control box ( Pushlock hanging m	
1 INFO	
	hanging mount kits will be -steel.
Coping overhang	cm
skimmer + Indicate the	exact skimmer positions.
	ons of the locking kits that have
To comply with the Frenche the locking kits must be i	ch NF P90-308 safety standard, nstalled in accordance with our technical instructions leaflet.

To comply with the French NF P90–308 safety standard, the locking kits must be installed in accordance with our recommendations in the technical instructions leaflet. The positioning of the locking kits will be determined by CF group according to the configuration of your pool. A detailed plan will be sent to you when your cover is delivered.

<u>Limits of use:</u> To comply with all NF P90-308 standards, it is essential that it is essential that all the elements making up this safety cover (mechanics, slats, motorization...) must come from CF group. If this is not the case, we will not be able to issue this certificate.

Limits of use: DEL covers for overflow pools can only be compliant if the pool is equipped with an Infinity box-type device for automatically lowering the water level by at least 2 cm when the cover is closed.

At present, DEL covers with a removable form on a side are not compliant with standard NF P90-308. Unless the alarm manufacturer specifies otherwise, immersion alarms are not compatible with DEL covers.

## **DISTANCE BETWEEN END-STANDS**

Pool width	Version	Max. distance between end-stands
2 m		2.35 m
2.50 m		2.85 m
3 m	Electric	3.35 m
3.50 m		3.85 m
4 m	or Solar	4.35 m
4.50 m		4.85 m
5 m		5.35 m
6 m		6.25 m
7 m		7.25 m
8 m		8.20 m
9 m	Electric	9.20 m
10 m		10.20 m

## 


Company:


Stairs (see on the following pages)

Skimmers on the lengths: OBC OAD


Order form date:

## SIDE OPPOSITE THE REEL SYSTEM Skimmer positions skimmer skimmer D Position of the locking kits that .....cm cm ..... cm have already been installed

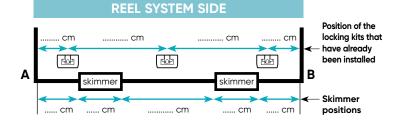




1 TUBE / REEL SYSTEM SIDE = AB



Min. distance between end-stands = pool width [AB] + 6 cm




Customer N°: Customer reference: Order form date: Company:

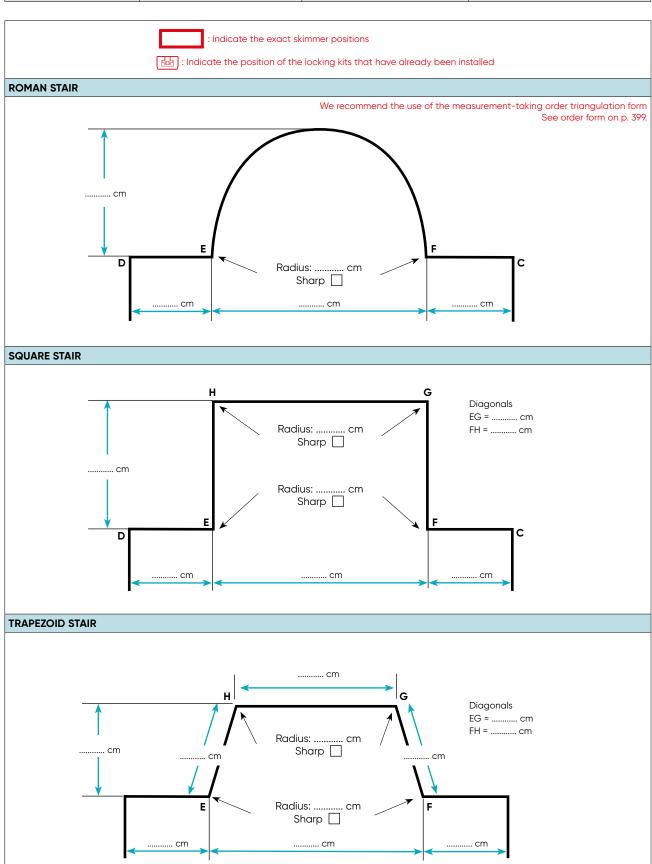



Customer N°:	Customer reference:	Order form date:	Company:

E2 = .....cm

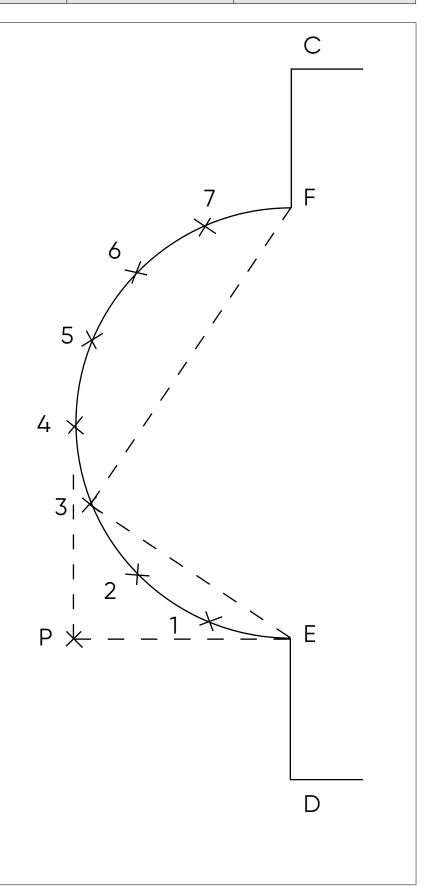



Customer N°:	Customer reference	:	Order form date:	
Company contact details:  Surname:  Postcode:  Country:  Phone:  E-mail:  Contact in case of missing measures and livernea Plus	surements:	Address:	ntact)écé factory (35530 Bréd please indicate the inve	cé, FRANCE)
SLATS				
☐ In-ground (decking above water)	In-ground (decking und	er water) Above-grou	nd (without covering)	Above-ground (with covering)
MODEL / COLOUR  Ivernea: Ivernea p  Beige Grey Ivernea		<b>←</b>	cm	<b>C</b> ↑
POOL DIMENSIONS (for in-ground covers, indicate the size e  Length:	r the coping	 cm <b>↓ A</b>		cm
SHAPE: Square Roman Indicate the stair position: On the AB width On the Along the AD length Along t FILTRATION BLOCK / CUT Yes (supply a drawing) No FITTINGS Bungee-clip OPTION Additional bungee clip(s): quant recommended for windy regions Additional anchors for windy reg	he BC length	H  cm  cm  cm	cm  G  F cm	
		cm	cm	cm

Company name:	Customer reference:

## 1 INFO

To allow us to deliver to you with maximum efficiency, please fill in this questionnaire carefully. We decline all liability in the event of the required delivery location being inaccessible due to the indications you have provided. Any new deliveries will be invoiced to you. Thank you for your understanding.



ORDERED EQUIPMENT			
Automatic slatted cover Bar	cover Bubble cover (c	ver 4.50 m)	
ROAD SIGNAGE LEADING TO THE REQ	UESTED DELIVERY POINT		
Have you already seen this type that leads to the requested de 3.5 T  Yes If so, please indicate which ones:	elivery point?		
No			
ACCESS TO THE REQUESTED DELIVERY	POINT: TYPES OF VEHICLE LI	KELY TO HAVE ACCESS	
Below are different vehicle types. Indica	te which types are likely to be	e able to pass in front of the re	quested delivery location.
0 00 00 00 00	0 00 00		
Tractor + trailer (38 tonnes):	Semi-trailer (38 tonnes):	Small carrier (19 tonnes):	Small truck (<6 tonnes):
Yes No	Yes No	☐ Yes ☐ No	☐ Yes ☐ No
Garbage trucks:	Concrete mixer trucks:	Fuel delivery trucks:	Small van:
TRUCK CLEARANCES: DETAILS			
Be careful of the truck clearance: Is the	delivery address subject to o		
Electric cables: Yes No	Low branches: Yes	No Corners of	roads: 🗆 Yes 🗆 No
OTHER INDICATIONS, PLEASE DESCRIB			