



Customer N°:	Customer reference:	Order form date:
--------------	---------------------	------------------

<b>Company contact details:</b> Surname: ..... Postcode: ..... City: ..... Country: ..... Phone: ..... E-mail: ..... Contact in case of missing measurements: ..... .....	<b>Delivery address:</b> Name: ..... Address: ..... Postcode: ..... City: ..... Country: ..... Phone (person to contact) ..... <input type="checkbox"/> Pick up at DEL Brécé factory (35530 Brécé, FRANCE)
--	--

☐ New pool
☐ Existing pool: to avoid re-taking the measurements, please indicate the invoice n°, order n° or delivery document n° for the original cover: .....

<b>COLOUR</b>	
<input checked="" type="checkbox"/> Green	
<b>REQUIRED OVERLAP</b> (pool size + 35 cm by default, 20 cm minimum)	
..... cm on either side	
<b>STAIRS</b>	
<input type="checkbox"/> Yes <input type="checkbox"/> No	
<b>SHAPE</b> <input type="checkbox"/> Square <input type="checkbox"/> Roman <input type="checkbox"/> Trapezoid	
French Safety Standard For covers compliant with the standard the stair will be manufactured in a rectangular shape.	
<b>ACCESSORIES</b>	
Storage bag (for cover max 90 m²)	<input type="checkbox"/> Yes <input type="checkbox"/> No
Support wires for concrete coping	<input type="checkbox"/> Yes <input type="checkbox"/> No
Support wires for wooden coping	<input type="checkbox"/> Yes <input type="checkbox"/> No
<b>INFO</b> The support wires are mandatory for pools over 6.00 m and necessary for snow region.	
<b>FITTINGS</b>	
<b>SAFETY FITTINGS</b> By choosing safety fittings the cover will be compliant with the NF P90-308 French standard.	<b>NON-SAFETY FITTINGS</b>
<b>ANCHOR</b> Standard: <input type="checkbox"/> P evolution anchor Options: <input type="radio"/> Telescopic anchor for concrete coping – aluminium <input type="radio"/> Telescopic anchor for wood coping	<b>ANCHOR</b> Standard: <input type="checkbox"/> P anchor Options: <input type="radio"/> Lawn anchor – stainless steel <input type="radio"/> Telescopic anchor for concrete coping – aluminium <input type="radio"/> Telescopic anchor – brass <input type="radio"/> Telescopic anchor for wooden coping – stainless steel / aluminium anchor
<b>TENSION</b> Standard: <input type="checkbox"/> Safety spring – stainless steel	<b>TENSION</b> Standard: <input type="checkbox"/> Stainless steel spring
For full compliance with the NF P90-308 French standard, it is essential that all the elements composing this safety cover (anchor, tensioning, etc.) come from CF group.	
<b>IMPORTANT:</b> There should not be any level differences around the pool coping. All accessories around the pool must be removable. In order to avoid the anchors to be removable using a force of less than 12 kg (once the cover has been stretched) the coping must be concrete or wood, and be sealed.	



Customer N°:	Customer reference:	Order form date:	Company:
--------------	---------------------	------------------	----------

**STAIRS**

Indicate the stair position  
(the measurements must be taken from above):

- ☐ On width AB      ☐ On width CD  
☐ On length AD      ☐ On length BC

**POOL**


- 1 Indicate the inside pool measurements  
 2 Diagonal AC = ..... cm  
 Diagonal BD = ..... cm



Diagonals taken at sharp corners.

**FILTRATION BLOCK - FILTRATION PANEL**

If filtration block, indicate the measurements on the diagram

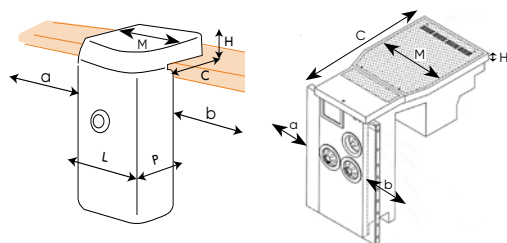

- Block - panel reference: .....  
 Width L = ..... cm  
 Width of the block out of the water M = ..... cm  
 Depth P = ..... cm  
 Block/coping height H = ..... cm  
 a. Block position = ..... cm  
 b. Block position = ..... cm  
 c. Depth on the coping = ..... cm

The block must be rectangular on the pool side to comply with the safety standard.

Indicate the filtration block position:

- ☐ On width AB  
☐ On width CD

**ADDITIONAL INDICATIONS IF REQUIRED****Inside pool measurements**