

TECHNICAL LEAFLET

AZTECK POOLS

All Azteck pools can be installed above-ground, half-inground or inground.

INSTALLATION:

Must be installed on a reinforced foundation slab (ground with concrete slab) at least 17 cm thick, irrespective of the model. Beware: any defects in the foundation slab will be visible when the pool is full.

3 to 4 weeks concrete drying time.

After complete drying, the structure's cast alu footers must be fixed to the ground (except for round pools); follow the procedure provided in the instructions supplied with the delivery.

All the Magnelis® panels must be bolted together.

Beware: the pool contains thousands of litres of water. A badly-prepared ground or badly assembled pool can cause serious damage (1,000 litres = 1 m³ = 1 ton).



FACINGS:

The facings are 15 cm high.



Number of facings:

- Above-ground: 9
- Half-inground: 4
- Inground: 1

SKIMDRESS:

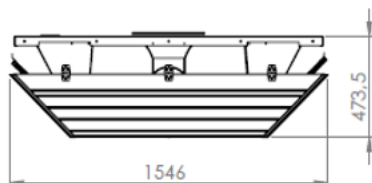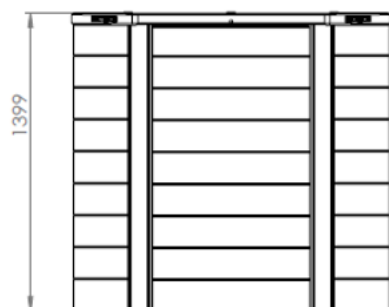

STANDARD SKIMDRESS

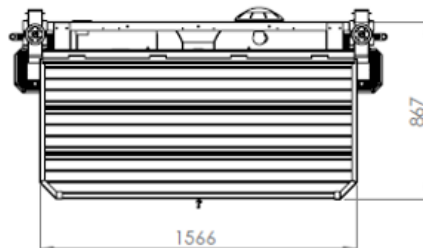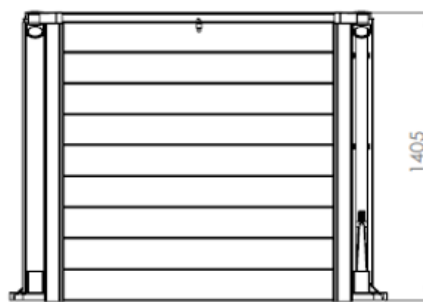

XL SKIMDRESS

INFO

The pool's electrical installation and filtration system must be done by a professional to comply with current standards.

CONSUMER PACKAGE:

1 pallet 1.40 m x 1.50 m + 1 pallet 1.83 m x 0.83 m.



**SCAN THIS
QR CODE TO
DISCOVER THE
INSTALLATION
VIDEO:**



TECHNICAL LEAFLET

AZTECK POOLS

Overall height (m)	Overall dimensions width x length (m)	Total ground surface width x length (m)	Dimensions of water surface width x length (m)	Flat surface (m ²)	Slab size width x length (m)	Trench size width x length (m)	Capacity [3] (m ³) Ht: 1.40m Water: 1.25m	Installation	System flow rate (m ³ /h)	Water recycling time (d)
1.40	Ø 4.40 m	4.26	4	11.43	4.60 x 4.60	5.00 x 5.00	14.28	[4] 5h [5]	6	2h20
	Ø 5.40 m	5.26	5	18.51	5.60 x 5.60	6.00 x 6.00	23.13	6h	6	3h50
1.40	4.00 m x 5.60 m	4.41 x 5.55	3.71 x 5.32	17.38	4.80 x 6.40	5.20 x 6.80	21.72	6h	6	3h40
	4.00 m x 7.30 m	4.41 x 7.15	3.71 x 6.91	23.35	4.80 x 8.00	5.20 x 8.40	29.19	7h	8	3h40
	4.00 m x 8.90 m	4.41 x 8.76	3.71 x 8.54	29.11	4.80 x 9.60	5.20 x 10.00	36.65	8h	11	3h20
	2.50 x 5.10 m	2.80 x 5.47	2.10 x 4.77	9.77	3.10 x 5.80	3.50 x 6.20	12.53	5h	6	2h00
1.40	3.00 x 3.50 m	3.33 x 3.85	2.63 x 3.16	9.02	3.70 x 4.20	4.10 x 4.60	10.39	5h	6	1h50
	3.50 x 5.10 m	3.86 x 5.47	3.16 x 4.77	16.45	4.20 x 5.80	4.60 x 6.20	18.86	6h	6	3h25
	3.50 x 6.70 m	3.86 x 7.09	3.16 x 6.39	21.81	4.20 x 7.40	4.60 x 7.80	25.23	7h	8	3h25
	3.50 x 8.30 m	3.86 x 8.70	3.16 x 8.00	27.21	4.20 x 9.00	4.60 x 9.40	31.60	8h	11	3h05
	4.05 m x 5.60 m	4.41 x 6.03	3.71 x 5.33	19.86	4.80 x 6.40	5.20 x 6.80	24.73	6h	8	3h05
	4.05 m x 7.30 m	4.41 x 7.64	3.71 x 6.94	25.85	4.80 x 8.00	5.20 x 8.40	32.21	7h	11	3h00
	4.05 m x 8.90 m	4.41 x 9.25	3.71 x 8.55	31.53	4.80 x 9.60	5.20 x 10.00	39.70	8h	11	3h40
	4.05 m x 5.60 m	4.41 x 7.42	3.71 x 5.33	18.59	4.80 x 6.40	5.20 x 6.80	23.24	6h	6	3h50
	4.05 m x 7.30 m	4.41 x 7.42	3.71 x 6.94	24.57	4.80 x 8.00	5.20 x 8.40	30.73	7h	8	3h50
	4.05 m x 8.90 m	4.41 x 9.07	3.71 x 8.55	30.50	4.80 x 9.60	5.20 x 10.00	38.13	8h	11	3h30
1.40	3.00 x 3.00 m	3.33 x 3.33	2.63 x 2.63	7.34	3.70 x 3.70	4.10 x 4.10	8.65	5h	6	1h30
	3.50 x 3.50 m	3.86 x 3.86	3.16 x 3.16	11.09	4.20 x 4.20	4.60 x 4.60	12.49	5h	6	2h20
	4.05 x 4.05 m	4.41 x 4.41	3.71 x 3.71	13.84	4.80 x 4.80	5.20 x 5.20	17.24	5h	6	2h50

When backfilling and making concrete slab, don't forget to take into account where the Skimdress is positioned.

[1]: Outside coping.

[2]: Outside cast alu footers or in the absence, outside facing.

[3]: Volume of water in the pool, approximate.

[4]: Approximate assembly time, not including the time spent preparing the plot or filling the pool with water.

[5]: For information purposes only.

[6]: Pool water recycling time taking into account the complete system flow rate of the filter unit (own filtering mass) associated with this kit.

The swimming pool kits marketed by CF Group France are designed for outdoor family use.

Always keen to improve the quality of its products, CF Group France reserves the right to modify or delete any model presented in this catalog without notice.

All measurements shown are given at indicative and may vary depending on the various tolerances required for manufacturing.

HEIGHT FROM THE GROUND (M)

Above-ground	1.40
Half-inground (with coping)	0.65
Inground (with coping)	0.20