

NORA SAFETY BARRIERS

Protective barrier for use on private pools in compliance with the French NF P 90-306 standard. This barrier is designed to limit children under 5 years old from accessing the pool.

It is recommended to install the barrier at least 1 m from the water edge. For private pools, it is recommended not to install the barrier too far from the pool in order to maintain its effectiveness.


Warning: when the protective barrier is combined with one or more walls, the wall height must not allow access to the pool (minimum 1.10 m between support points) and must not allow access to the pool through their openings (doors and windows shut using a child proof system).

Whatever the plot profile (slope, steps, etc.), the height between two supporting points must always be 1.10 m once the protective barrier has been installed.

Joining of 2 barriers in a straight line using a double post with a 75 mm spacing.

A corner must be composed of 2 modules. The corners authorised between 2 modules must be between 0° and 90° (the corner is measured between the extension on the 1st module and the following module).

A certain spacing must be observed between the last post on the 1st module and the 1st post on the 2nd module so that the safety lock operating measurements are complied with. This spacing varies depending on the angle.

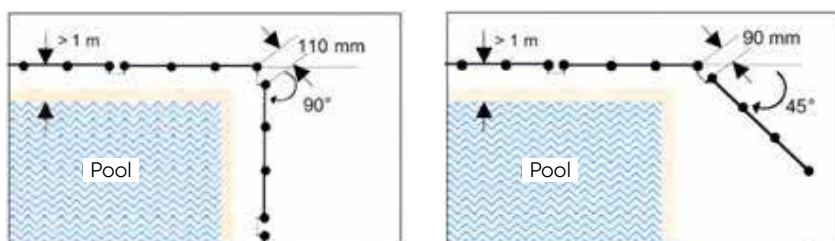

Elements composing the barrier: 1 pre-assembled module composed of a net and posts with supporting rods, sheaths + caps, 1 instruction manual and 1 bag of spare parts (lock, sheath).

Can be recut using a ruler with 11 removable screws.

Anchoring method: using a sheath (included) embedded in flat, rigid and stabilised ground (concrete slab or blocks).