

IN-GROUND AUTOMATIC SLATTED COVER
ROLLENERGY EVOLUTION



The ideal in-ground automatic cover for pool renovations



IN-GROUND AUTOMATIC SLATTED COVER ROLLENERGY EVOLUTION

+ ADAPTABLE


- Suitable for all types of pools under construction or renovation without altering the pool structure.

+ DISCREET

- The in-ground slatted cover is in a pit covered by a decking above the waterline. The motor is housed inside the roller tube.
- The colours of the cover parts can be matched together for perfect integration (beam, beam's supports, decking, slats, locking kits, separating wall).

+ DEL KNOW-HOW

- The Rolleenergy Evolution automatic slatted cover has been manufactured in our workshops since 2007.

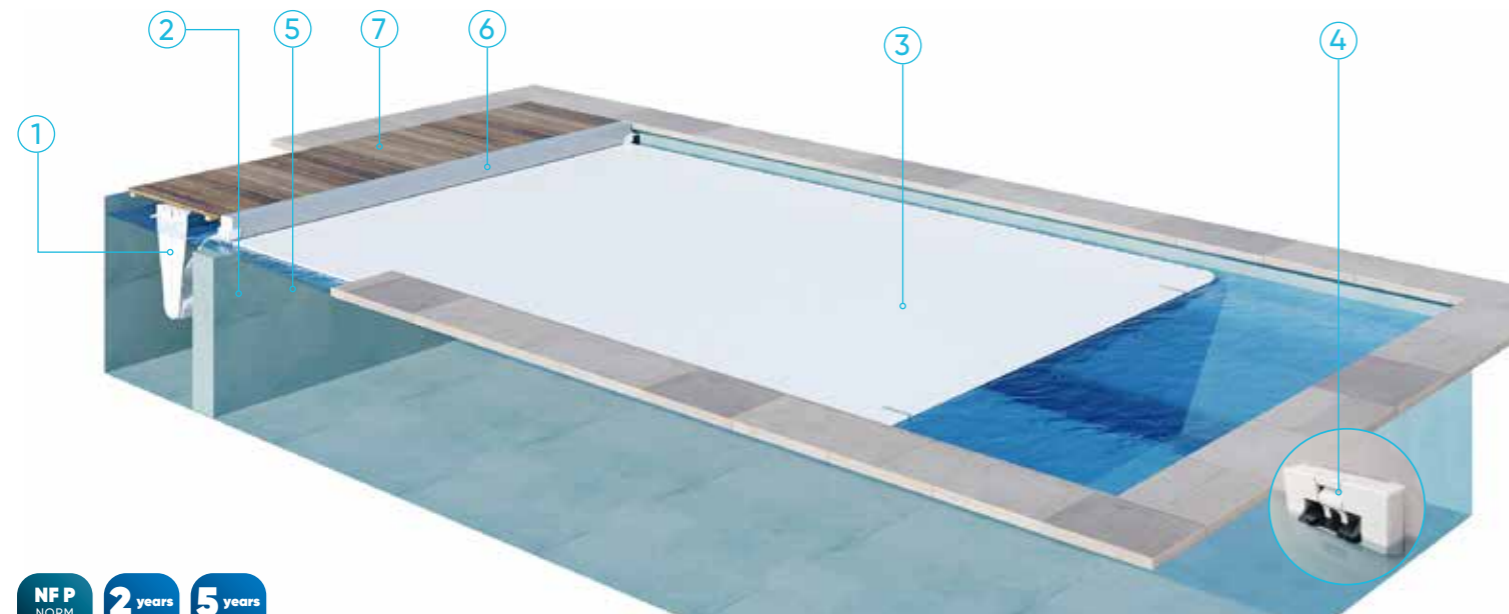

Cover available for pools from 2.00 x 3.00 m and up to 8.00 x 15.50 m.

1 SIDE SUPPORT

- White composite.

2 MOTORISATION

- "Stop salt" control.
- Automatic switch.
- Controlled by Wi-Key, key switch or LivePool.

3 SLATS

- Opaque 84 PVC slats, solar polycarbonate slats or opaque 69 PVC slats.

4 LOCKING KITS

5 ALUMINIUM TUBE

6 ANODISED ALUMINIUM BEAM

7 TEAK DECKING OR ALUMINIUM DECKING

8 STOP FLOW

- Control of the filtration of the cover. It allows to stop the filter pump when the automatic cover motor is working.

Your slats choice

All our slats have a quality finish and are compliant with the NF P90-308 standard.

Opaque PVC 84 slats



White



Grey

Opaque PVC 69 slats



White



Beige



Grey



Blue

Solar polycarbonate slats



Absolute black



Crystal black



Crystal blue



Crystal brown



Silver



Crystal



Crystal green

Why cover your pool?

- Reduce water consumption by limiting evaporation.
- Reduces energy consumption.
 - Makes cleaning easier & reduced consumption of chemical products.

USEFUL TO KNOW

Choose solar polycarbonate slats to heat your pool water.



Read carefully and keep for future reference.

Rollenergy Evolution is a safety slatted cover for swimming pools, designed to keep children under the age of 5 out of the pool. This product is compliant with NF P90-308 standard if installed with the recommended safety locking kits. It is not a substitute for common sense or personal responsibility. It is no substitute for the vigilance of parents and/or responsible adults, which remains the essential factor for the safety of young children. A child can drown in less than 3 minutes; no type of preventive measures can replace the monitoring and vigilance of a responsible adult.

Warranty: 5 years for the tubular motor. 3 years' warranty on opaque PVC 84 slats and opaque PVC 69 slats and 5 years' warranty on the solar polycarbonate slats. The roller is warranted for 2 years, in accordance with our general terms of sale.

Order form: for the cover to be properly adjusted to the swimming pool, it is essential to provide a drawing of the pool measured metre by metre. As specified by standard NF P90-308, the gap between the inner side of the pool and the edge of the cover must be less than 70 mm.

Time needed to operate a pool measuring 5.00 x 10.00 m: 3 minutes to automatic opening or closing and 30 seconds for locking or unlocking the locking kits. The Rollenergy Evolution can be opened or closed by one person.

Use: all year round. To keep your cover in good working conditions, maintain a constant water level that matches the normal filtration rate of the swimming pool. The use of a water level regulator is essential. It must comply with the instruction manual.

Use limits: DEL automatic slatted covers used on overflow pools can comply with the French Safety Standard only if the pool is equipped with a device such as the Infinity control box that automatically lowers the water level by at least 2 cm when the automatic slatted cover is closed on the pool. The installation of a DEL automatic slatted cover on overflow pools and/or pools with steps on the length side (removable steps on the side) is not compliant with the NF P90-308 standard. In this case other compliant systems should be used. Unless otherwise specified by the manufacturer, immersion alarms are not compatible with automatic slatted covers.

Wintering: the swimming pool must be wintered on the basis of its geographical location. Without lowering the water level, close the cover to its safety position and where applicable install a wintering net to protect the cover. If the water level is lowered so that the wall units are above the waterline, roll the cover in and secure the pool using a winter safety cover.

Packing list: for a swimming pool measuring 5,00 x 10,00 m. 84 PVC opaque slats: 4 packages: 5.10 x 0.39 x 0.11 m - 190 kg. / Solar polycarbonate slats and 69 PVC opaque slats: 5 packages: 5.10 x 0.25 x 0.20 m - 250 kg / Tube: 1 package: 5.10 x 0.15 x 0.15 m - 40 kg / Beam: 1 package: 5.10 x 0.15 x 0.15 m - 34 kg / Decking: 1 pallet: 1.20 x 1.00 x 0.50 m - 100 kg / Motorisation kit: 1 package: 0.60 x 0.35 x 0.35 m - 20 kg / Beam support: 1 package: 0.30 x 0.20 x 0.20 m - 10 kg / Locking kits: 1 package: 0.30 x 0.20 x 0.20 m - 5 kg / Total weight: 400-410 kg.

Manufacturer: DEL SAS - ZA La Croix Rouge - 35530 Brécé - FRANCE
www.del-piscine.fr/en

LIVEPOOL

Opening & closing of the automatic cover with a smartphone thanks to the free LivePool App.

DON'T FORGET

Protect your slats from UVs and dirt with the Ivernea winter shift or the Ivernea Plus 4-season protective shift.

FOR MORE INFORMATION, PLEASE ASK YOUR POOL EXPERT

DEL SAS with a capital of 2 300 000 € - RCS 303355671 Rennes - ZA La Croix Rouge - 35530 Brécé - FRANCE • Non-binding document • © DEL SAS, Nicolas Kosica, Pascal Avenet • 05/24 • Do not throw away • A-DBROI2100LI



a brand by

