



**IN-GROUND  
AUTOMATIC SLATTED COVER**

**ROLLFIT**





**The in-ground automatic slatted cover built into a niche**



# IN-GROUND AUTOMATIC SLATTED COVER ROLLFIT

## + DISCRETION

- Perfect integration into the pool. The Rollfit is built into a niche, there is any loss of swimming space.

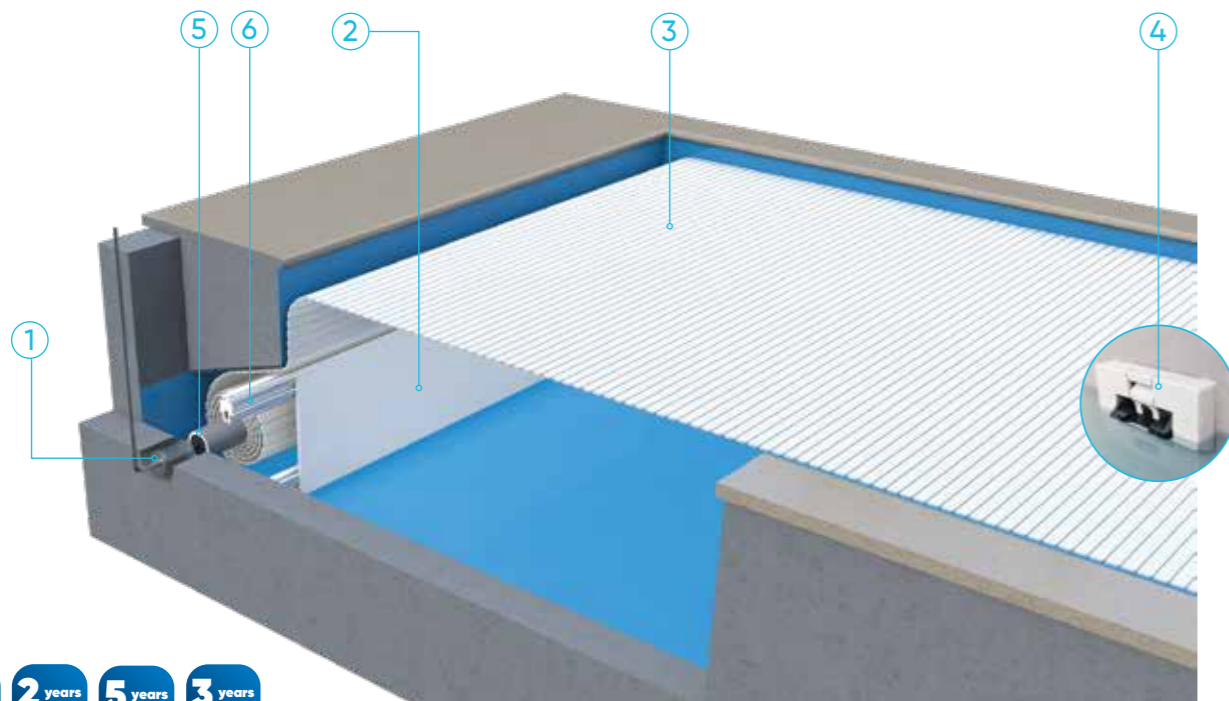

For pools from 2.00\* x 3.00 m up to 6.00 m wide x 20 m long.

- 1 MOTORISATION**
- 2 motorisations and 2 fixings available:
    - Motor in a dry pit - insert mount fixing.
    - Tubular motor - insert mount fixing.
- Controlled by Wi-Key, key switch or LivePool.

- 2 CASING**
- PVC decking to be covered.

- 3 SLATS**
- Opaque 84 PVC slats, solar polycarbonate slats or opaque 69 PVC slats.

- 4 LOCKING KITS**

- 5 ALUMINIUM TUBE**

- 6 ALUMINIUM BEAM**

- 7 STOP FLOW**
- Control of the filtration of the cover. It allows to stop the filter pump when the automatic cover motor is working.

\* To comply with French safety NF P90-308 standard, the cover must have a minimum width of 2.50 m (84 PVC slats) or 2.00 m (69 PVC or Polycarbonate slats).

## Why cover your pool?

- To reduce the water consumption by limiting the evaporation.
- To reduce the energy consumption.
- To make the cleaning easier & to reduce the use of chemical products.


## Your slats choice

All our slats have a quality finish and are compliant with the NF P90-308 standard.




### Opaque PVC 84 slats



### Opaque PVC 69 slats



### Solar polycarbonate slats



**USEFUL TO KNOW**  
Choose solar polycarbonate slats to heat your pool water.



#### Read carefully and keep for future reference.

Rollfit is a safety slatted cover for swimming pools designed to keep children under the age of 5 out of the pool. This product is compliant with NF P 90-308 standard. It is not a substitute for common sense or personal responsibility. It is not substitute for the vigilance of parents and/ or responsible adults, which remains the essential factor for the safety of young children. A child can drown in less than 3 minutes; no type of preventive measures can replace the monitoring and vigilance of a responsible adult.

**Warranty:** 5 years for the tubular motor and 3 years for the motor in dry pit. 3 years' warranty on opaque PVC 84 slats and opaque PVC 69 slats. and 5 years's warranty on the solar polycarbonate slats. The roller is warranted for 2 years, in accordance with our general terms of sale.

**Order form:** for the cover to be properly adjusted to the swimming pool, it is essential to provide a drawing of the pool measured metre by metre. As specified by standard NF P 90-308, the gap between the inner side of the pool and the edge of the cover must be less than 70 mm.

**Time needed to operate a pool measuring 5.00 x 10.00 m:** 3 minutes for automatic opening or closing and 30 seconds for locking or unlocking the locking kits. The Rollin can be opened or closed by one person.

**Use:** all year round. To keep your cover in good working conditions, maintain a constant water level that matches the normal filtration rate of the swimming pool. The use of a water level regulator is essential. It must comply with the instruction manual.

**Use limits:** The installation of a cover on overflow pools and/or pools with steps on the length side (removable steps on the side) is not compliant with the NF P90-308 standard. In this case other compliant systems should be used. Unless otherwise specified by the manufacturer, immersion alarms are not compatible with automatic slatted covers.

**Wintering:** the swimming pool must be wintered on the basis of its geographical location. Without lowering the water level, close the cover to its safety position and where applicable install a wintering net to protect the cover. If the water level is lowered so that the wall units are above the waterline, roll the cover in and secure the pool using a winter safety cover.

**Packing list:** for a swimming pool measuring 5.00 x 10.00. Opaque 84 PVC slats: 4 packages: 5.10 x 0.39 x 0.11 m - 190 kg. Solar polycarbonate slats and 69 PVC opaque slats: 5 packages: 5.10 x 0.25 x 0.20 m - 250 kg / Tube: 1 package: 5.10 x 0.15 x 0.15 m - 40 kg / Beam: 2 packages 5.05 x 0.25 x 0.20 m - 60 kg / Decking: 1 package 1.20 x 1.00 x 0.50 m - 120 kg / Motorisation kit: 1 package 0.80 x 0.60 x 0.50 m - 20 kg / Mechanics wall units: 1 package 0.30 x 0.20 x 0.20 m - 5 kg / Total weight: 435 - 445 kg.

**Manufacturer:** DEL SAS - ZA La Croix Rouge - 35530 Brécé - FRANCE  
[www.del-piscine.fr/en](http://www.del-piscine.fr/en)

#### LIVEPOOL

Opening & closing  
of the automatic cover  
with a smartphone thanks to the  
free LivePool App.

#### DON'T FORGET

Protect your slats from  
UVs and dirt  
with the Ivernea winter shift  
or the Ivernea Plus 4-season  
protective shift.

FOR MORE INFORMATION, PLEASE ASK YOUR POOL EXPERT

DEL SAS with a capital of 2 300 000 € - RCS 303355671 Rennes - ZA La Croix Rouge - 35530 Brécé - FRANCE • Non-binding document • © DEL SAS, Mealesia Photographie, Haley Phelps • 07/24 • Do not throw away • DBRO12104.L1



a brand by

