


EN

INSTALLATION INSTRUCTIONS

INSTALLATION/CARE/MAINTENANCE/SAFETY INSTRUCTIONS

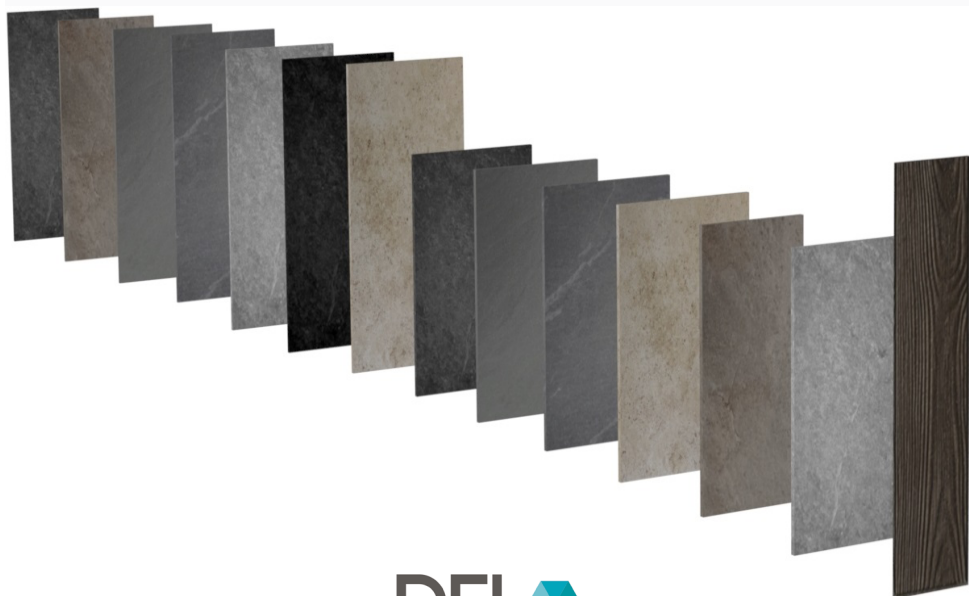

DEL 

LOCKING KITS

CERAMIC STONEWARE

CONTENTS

READ THESE INSTRUCTIONS CAREFULLY AND KEEP THEM FOR FUTURE REFERENCE

Read this manual carefully to ensure you understand all the information it contains and that the cover is safely installed, used and maintained. We cannot be held responsible in the event of damage resulting from failure to follow the instructions given in this manual.

DESCRIPTION.....	p. 3
INFORMATION.....	p. 5
INSTALLATION.....	p. 6
SAFETY INSTRUCTIONS.....	p. 8
RECYCLING	p. 10
REGULATIONS.....	p. 11















DESCRIPTION

COMPONENTS PROVIDED

➤ OPTIONS



Non-slip porcelain stoneware gratings, with slip resistance R11 to DIN 51130 and A+B+C to DIN 51097, for Rollinside shutters – Made to order :

	90 x 45 cm beige		120 x 60 cm beige
	90 x 45 cm light gray		120 x 60 cm light gray
	90 x 60 cm anthracite		120 x 60 cm anthracite
	90 x 60 cm travertine		120 x 60 cm travertine
	90 x 60 cm waxed concrete		120 x 60 cm waxed concrete
	90 x 60 cm granite		120 x 60 cm granite
	120 x 30 cm wood		120 x 60 cm black

DESCRIPTION

TOOLS REQUIRED FOR ASSEMBLY



no tools
required

PACKING LIST



1 package
package: 0.30 x 0.21 x 0.17 m
Weight in kg: variable

ASSEMBLY



1 persons



2 hours

INFORMATION

PRE-REQUISITES




Gratings are supplied from the factory with :

- A protective strip designed to rest on the joist or partition wall.
- A stop adjustment device to adjust the position of the stops according to variations in the wall and/or the joists.
- The radius of the liner must be less than 2cm to avoid puncturing it.
- Stoneware gratings are incompatible with shell pools.




Dimensions to be respected during installation to ensure user safety:

- The clearance between the wall and the back of the gratings must be less than 70 mm.

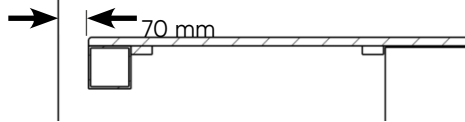

- The clearance between the wall and the sides of the gratings must be less than 7 mm.

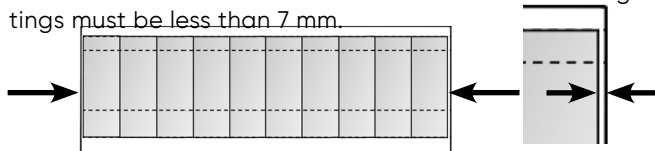

- The grating must not protrude behind the joist.
- The grating must not protrude beyond the front of the partition wall.
- Make sure your grating is strong enough.
- Grating weight: 44 kg / m².




Don't forget your safety equipment.



WE ADVISE YOU TO READ ALL THE INSTALLATION STEPS BEFORE SETTING UP, TO AVOID UNNECESSARY HANDLING.

INSTALLATION

GRATING INSTALLATION

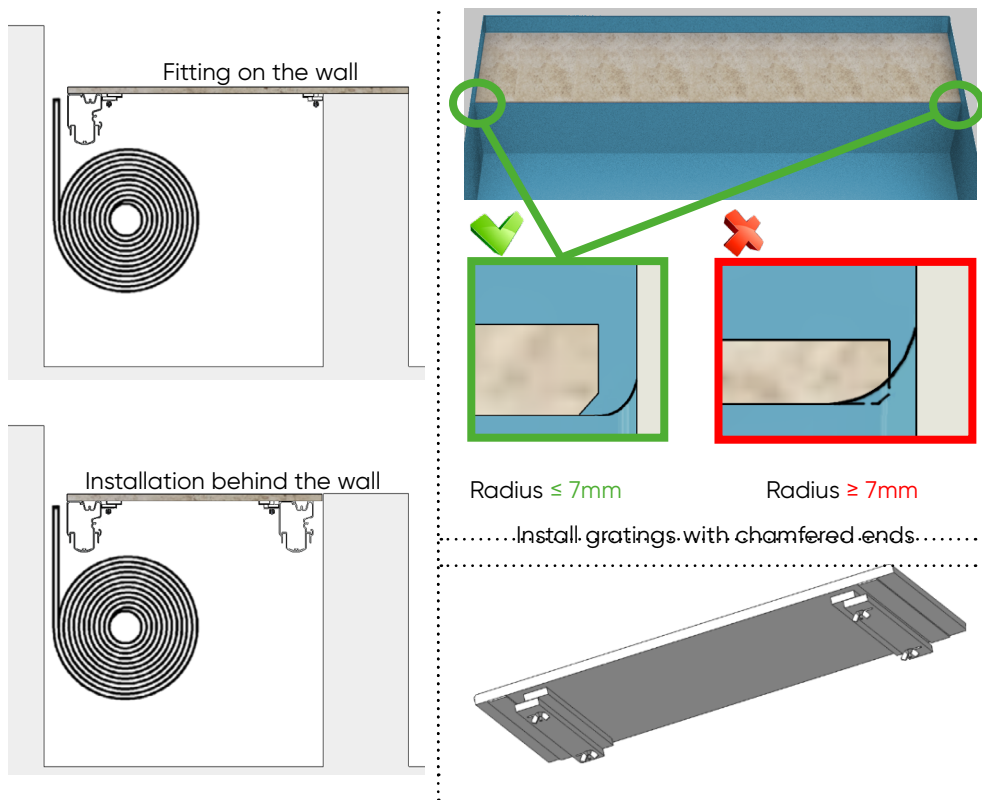

1. Install the grating element in its housing.
2. Align the grating element with the previous ones.
3. Slide the stops against the joist and the dividing wall.
4. Tighten the 4 butterfly screws to lock the stops.

The stoneware gratings rest on the beams and have no clips.



! Tighten the adjustable stops against the beam and the partition wall to lock the position of the grating.

INSTALLATION

MAINTENANCE (AT CUSTOMER'S EXPENSE)

The use of a neutral detergent is recommended for daily cleaning. Commercial detergents containing waxes and shiny additives, which can leave undesirable patinas on grating components, should be avoided. We strongly advise against the use of waxes, oleaginous soaps, impregnants and various treatments (water and oil repellents) on gratings, whose application is unnecessary. If these treatments are present, they must first be removed from the grating elements using specific products, following the manufacturer's instructions. In the case of patinas created by soap, limescale or dirt, an acid detergent should be used, suitably diluted in water (follow the instructions on the product label). Please note that hydrofluoric acid (HF) and its derivatives can cause irreparable damage to tiles. For ordinary cleaning, we recommend the use of bleach or ammonia, suitably diluted in water. All glossy or polished surfaces need to be cleaned with non-abrasive tools to avoid opacification and scratches.

- Do not run, walk with care, as the surface of the gratings can be made slippery by poor maintenance.
- Take care to clean the gratings regularly so that their surfaces do not become slippery.
- If slippery surfaces appear on the gratings, remove them and clean them mechanically. Cleaning restores the initial anti-slip properties to the level of R11 slipperiness to DIN 51130 and A+B+C to DIN 51097.
- Cleaning and maintenance by the user must not be carried out by unsupervised children.

SAFETY ADVICE

Please read the recommendations set out below with care.

WARNING

Swimming pools can represent a serious danger for your children. Drowning can happen very quickly.

Children who are close to a swimming pool need to be watched constantly and actively, even if they know how to swim.

Learn lifesaving skills.

The physical presence of an adult is absolutely essential whenever the pool is open.



Memorise the telephone numbers for the emergency services and ensure that they are displayed close to the pool.

18 (in France) or **112**

FIRE SERVICE

15

**AMBULANCE
SERVICE**

(write the number that applies in your region)



POISON CONTROL

CENTRE

SAFETY ADVICE

- This section is by no means a replacement for common sense or individual responsibility. Its aim is not to replace the vigilance of parents and/or responsible adults, who remain the essential factor in ensuring the protection of young children.
- **Warning:** safety is only guaranteed when the cover is closed, locked and correctly installed in compliance with the manufacturer's instructions.
- The cover must systematically be closed if you are absent from home, even for a very short period.
- Check that no persons and no foreign objects are in the pool before and during opening and closing operations.
- Store the devices and/or tools needed to operate the covers out of the reach of children.
- Operation of the mechanism must only be carried out by a responsible adult.
- With the exception of movable floors, movable terraces and the covering elements provided for this purpose (e.g. gratings), do not climb, walk or jump on a safety cover.
- Take all necessary measures to prevent access to the pool for young children until the cover is repaired or when a malfunction is observed that prevents closing or in case of temporary unavailability of the equipment or the pool.
- Respect the water levels designated by the manufacturer.
- Children must not play with the appliance.
- This appliance may be used by children aged 8 and over, and by persons with reduced physical, sensory or mental capabilities or lack of experience and knowledge if they have received supervision or instructions concerning the safe use of the appliance and understand the hazards involved.

A child can drown in less than 3 minutes, no type of protection can ever replace the watchful eye and vigilance of a responsible adult.

RECYCLING

PACKAGING



Dispose of the packaging in line with current rules and regulations.

END OF LIFE



- Do not throw away your discarded equipment or used batteries with unsorted household waste.
- It is your responsibility to dispose of all your waste, particularly electrical and electronic equipment, by taking it to a dedicated collection point for recycling.
- Certain products potentially contain substances that are hazardous to the environment, and these will be removed or neutralised.
- Find out about existing take-back and collection systems.



discard the manual in line with the current regulations.



Adresses sur quefairedemesdechets.fr

REGULATIONS

STANDARD

- To ensure full compliance, the conditions of installation and use specified in the technical manual must be observed.

WARRANTY CONDITIONS

Log on to www.del-piscine.fr to view all our warranties.



<https://www.del-piscine.fr/rechercher-une-garantie>

DEL SAS
ZA LA CROIX ROUGE
35530 BRÉCÉ - FRANCE

☎ +33 (0)9 70 72 5000 / INFO.FR@CF.GROUP

STAMP

A brand by CF group



ORIGINAL INSTRUCTIONS

A-DOTE03632.I1 / 06.2024